

Note: for those who prefer front side/back side tatting the text in *italics and red* indicates where the worker needs to use the second half of the ds first.

Abbreviations

SR	split ring	vsp	very small picot	CI	close
SS	switch shuttles	Ch	chain	RW	reverse work
+	join				

SR9: 3 vsp 3 vsp 3 / 6 CI SS
Ch: 2 vsp 2 RW
R10: 4 + (vsp SR8) 4 CI RW
Ch: 4 RW
R11: 4 + (vsp SR7) 4 CI RW
Ch: 5 RW

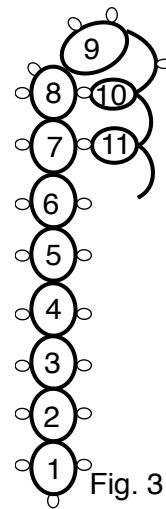


Fig. 3

[Link to Day 2](#)