

Note: for those who prefer front side/back side tatting the text in *italics and red* indicates where the worker needs to use the second half of the ds first.

Abbreviations

R	ring	vsp	very small picot	Cl	close	+	join
SS	switch shuttles	RW	reverse work				

R19: 6 + (vsp SR8) 3 vsp 5 vsp 1 Cl RW SS

You should now working with shuttle 1 (no beads on the thread.

SR20: 2 + (vsp last Ch) 2 / 3 vsp 3 Cl

SR21: 4 / 2 vsp 2 Cl

SR22: 4 / 2 vsp 2 Cl

SR23: 4 / 2 vsp 2 Cl

SR24: 4 / 4 Cl

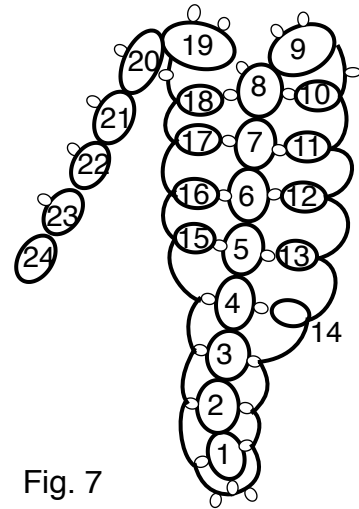


Fig. 7

[Link to Day 6](#)