




[Click here](#)

Note – for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the double stitch first.

Abbreviations

R	ring	Ch	chain
vsp	Very small picot	-	picot
Cl	close	RW	Reverse work
DNRW	Do not reverse work	Lj	Lock join
SS	Switch shuttles	RoCH	Ring on chain

- R1: 3 – 3 vsp 3 – 3 Cl RW
Ch: 4 RW
 R2: 3 + (last p R1) 3 – 3 vsp 4 – 4 Cl RW
Ch: 5 – 5 – 3 RW
 *SR3: 3 + (R2) 3 / 3 – 1 - - 1 – 3 Cl RW
Ch: 3 – 5 – 5 Lj (vsp R2) 4 RW
 R4: 3 + (R2) 3 + (vsp R1) 3 – 3 Cl DNRW
 SR5: 3 – 3 / 3 – 3 Cl DNRW
 R6: 3 – 3 vsp 3 – 3 Cl RW
Ch: 4 RW
 R7: 3 + (R6) 3 – 3 vsp 4 – 4 Cl RW
Ch: 5 + (p on opposite Ch) 5 – 3 RW

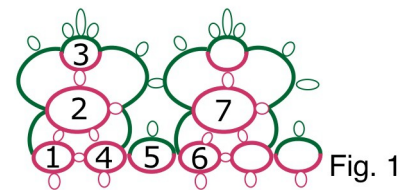

Repeat from * for length required. Start the corner (see below) after finishing an SR3.

Corner

- Ch: 3 – 5 SS*
RoCH4: 2 – 1 - - 1 – 2 vsp 6 Cl SS
Ch: 5 Lj (vsp R2) 4 RW
 R5: 3 + (R2) 3 + (vsp R1) 3 – 3 Cl DNRW
 R6: 3 + (R5) 3 vsp 3 – 3 Cl RW
Ch: 4 RW
 R7: 3 + (last p R6) 3 – 3 vsp 4 – 4 Cl RW
Ch: 5 SS
RoCH8: 6 + (RoCH4) 2 – 1 - - 1 – 2 Cl SS
Ch: 5 – 3 RW

Now continue from SR3 on side

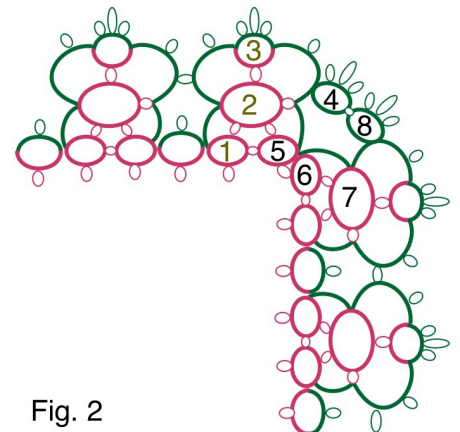


Fig. 2

For further information or help [please email me.](#)