


The Slope and Roll Join is used to give a smoother looking finish to a shuttle join yet allowing the core thread to still run smoothly through the join.

Work up to the joining place. Take the hook through the picot and pulling the thread running round the back of the hand back up through to the front of the work.



Take the shuttle through this loop from the front to the back and carefully tighten all threads. Do not allow the loop to pop back through the picot.

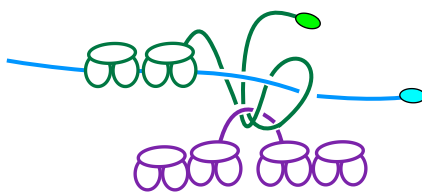

The working thread (core thread) will still be able to slide through the completed join like the [Catherine Wheel Join which can be found here.](#)