

Note: for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the ds first. Please ignore if you don't want to use that method.

Abbreviations

R	ring	Ch	chain
vsp	Very small ring	RW	Reverse work
Cl	close	+	join
SS	Switch shuttles	DNRW	Do not reverse work
+	join	btwn	Between

Cautious tatters row 3

R18: 3 vsp 3 + (Ch btwn R10 & R11) 3 - 3 Cl RW

Ch: 3 vsp 3 RW

R19: 3 + (R18) 3 + (Ch btwn R11 & R12) 3 - 3 Cl RW

Ch: 3 vsp 3 RW

R20: 3 + (R19) 3 + (Ch btwn R12 & R13) 3 - 3 Cl RW

Ch: 3 vsp 3 RW

R21: 3 + (R20) 3 + (Ch btwn R13 & R14) 3 - 3 Cl RW

Ch: 3 vsp 3 RW

R22: 3 + (R21) 3 + (Ch btwn R14 & R15) 3 - 3 Cl RW

Ch: 3 vsp 3 RW

R23: 3 + (R22) 3 + (Ch btwn R15 & R16) 3 - 3 Cl RW

Ch: 3 vsp 3 RW

R24: 3 + (R23) 3 + (Ch btwn R16 & R17) 3 vsp 3 Cl DNRW SS and **do not** cut and tie.

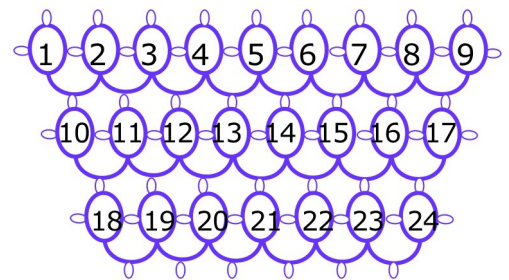


Fig. 3