

Note: for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the ds first. Please ignore if you don't want to use that method.

Abbreviations

R	ring	Ch	chain
vsp	Very small ring	RW	Reverse work
Cl	close	+	join
Fp	False picot	Sch	Split chain
SS	Switch shuttles	DNRW	Do not reverse work
BTS	Bare thread space	btwn	Between
+	join		

Intrepid tatters – row 1

Ch: 3 RW leave BTS for the rest of this chain to be a split chain.

R9: 3 + (R8) 3 vsp 3 vsp 3 Cl DNRW

SCh: 3 using ring thread to take you back along BTS of previous Ch.

Continue using the same Sh (Sh1)

Row 2

SR10: Fp 3 vsp 3 / Fp 3 – 3 Cl SS

Ch: 3 – 3 RW

R11: 3 + (SR10) 3 + (Ch btwn R8 & R7) 3 – 3 Cl RW

Ch: 3 – 3 RW

R12: 3 + (R11) 3 + (Ch btwn R7 & R6) 3 – 3 Cl RW

Ch: 3 – 3 RW

R13: 3 + (R12) 3 + (Ch btwn R6 & R5) 3 – 3 Cl RW

Ch: 3 – 3 RW

R14: 3 + (R13) 3 + (Ch btwn R5 & R4) 3 – 3 Cl RW

Ch: 3 – 3 RW

R15: 3 + (R14) 3 + (Ch btwn R4 & R3) 3 – 3 Cl RW

Ch: 3 – 3 RW

R16: 3 + (R15) 3 + (Ch btwn R3 & R2) 3 – 3 Cl RW

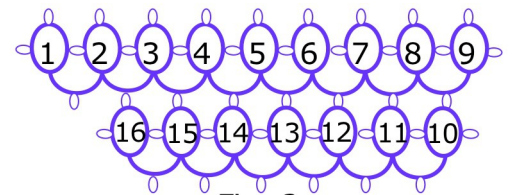


Fig. 2