

Note: for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the ds first. Please ignore if you don't want to use that method.

Abbreviations

R	ring	Ch	chain
Cl	close	RW	Reverse work
P or -	picot	vsp	Very small picot
Fp	False picot (small BTS space)	SCh	Split chain
SS	Switch shuttles	Sh	shuttle
DNRW	Do not reverse work	BTS	Bare thread space
btwn	between	+	join

Intrepid tatters – row 2

Ch: 3 RW leave BTS for the rest of this chain to be a split chain.

R17: 3 + (R16) 3 + (Ch btwn R2 & R1) 3 vsp 3 Cl DNRW

SCh: 3 using ring thread (Sh2) to take you back along BTS of previous Ch.

Continue using the same Sh

Intrepid tatters – row 3

SR18: Fp 3 vsp 3 / Fp 3 – 3 Cl DNRW SS

Ch: 3 vsp 3 RW

R19: 3 + (SR18) 3 + (Ch btwn R16 & R15) 3 – 3 Cl RW

Ch: 3 vsp 3 RW

R20: 3 + (R19) 3 + (Ch btwn R15 & R14) 3 – 3 Cl RW

Ch: 3 vsp 3 RW

R21: 3 + (R20) 3 + (Ch btwn R14 & R13) 3 – 3 Cl RW

Ch: 3 vsp 3 RW

R22: 3 + (R21) 3 + (Ch btwn R13 & R12) 3 – 3 Cl RW

Ch: 3 vsp 3 RW

R23: 3 + (R22) 3 + (Ch btwn R12 & R11) 3 – 3 Cl RW

Ch: 3 vsp 3 RW

R24: 3 + (R23) 3 + (Ch btwn R11 & R10) 3 vsp 3 Cl DNRW SS

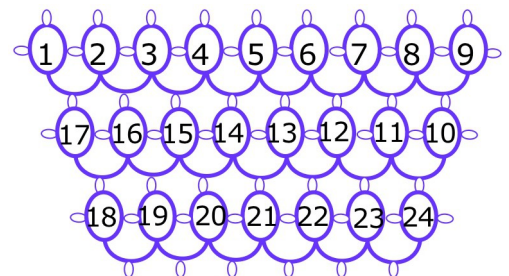


Fig. 3