

**Note:** for those who prefer front side/back side tatting the text in italics and red indicates where the worker needs to use the second half of the ds first. Please ignore if you don't want to use that method.

**Abbreviations**

Cl	close	vsp	Very small picot
P or -	picot	SS	Switch shuttles
Fp	False picot (small BTS space)		

Still using Sh1 – continue

- SR39: Fp 3 – 6 / Fp 3 Cl
- SR40: 6 / 6 Cl
- SR41: 6 / 6 Cl
- SR42: 6 / 3 + (vsp SR32) 3 Cl SS

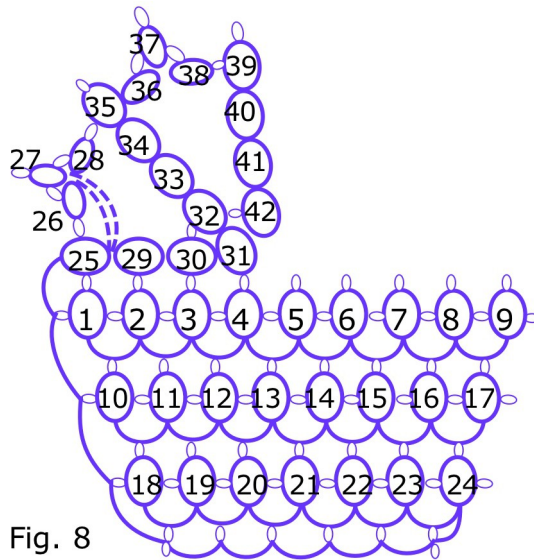


Fig. 8

[Link to TIAS blog.](#)